

APD 1425 M

Mitsubishi


D+' &'

Manufacturer		Mitsubishi
Model		S12R-PTA
		% \$\$' "# "
		%&\$Z\$\$' "
		0%') Z\$\$< DQ
	L	49,000
	"	170X180
		14:1
	fl # 7	"# " 1500
	fl 7	L 180,00
		L 335,00
AbsorbedAirDischargeReSourceKey.Text	' # "	98,00
	' # "	1800,00
		24 V d.c.
	Load	%\$ \$i
	# "	
		260,60

		ECO43-2LN/4
	Hz	50
	"	1300,00
7 cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 1425 M	9500,00	4400,00	2100,00	2200,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 96.	13170	7500	2300	2500+1300	1900

D+' &'

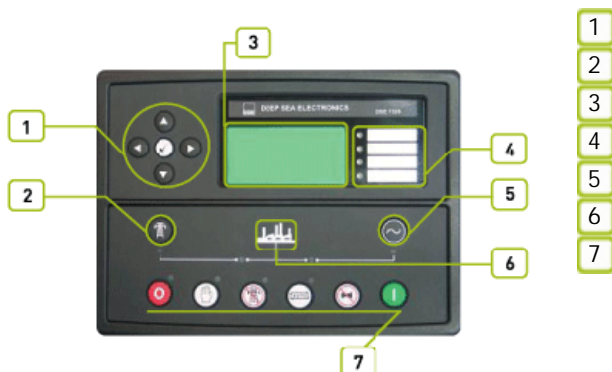

APD 1425 M

Mitsubishi

D+' &'

1

'8G9ž '+' &\$ž) 5ž&&\$#&(\$

2

3

4

'8G9+' &\$
&&\$ ž

fl

"'8G9+' &\$

'8G9+' &\$

ž

% &l '* (

žFG&' &žFG(,) ž

ž

APD 1425 M

Mitsubishi

D+' &'

f@z@Bl
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž

ž

"

"


"

"

APD 1425 M

Mitsubishi

D+' &'

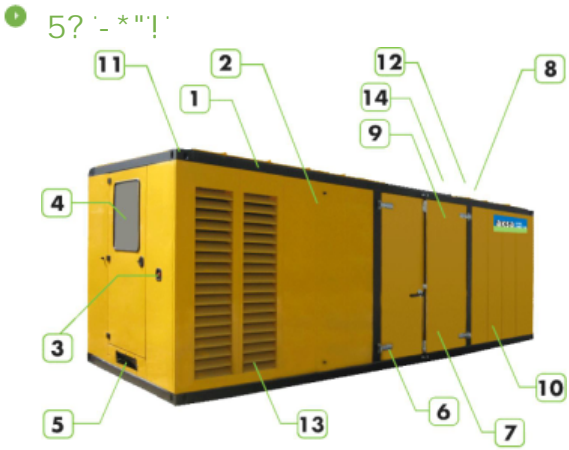

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2300
fl "L	"	7500
fl "L	"	2500+1300
	L	1900